

The Leading manufacturer of PET& PP Strapping

Be aware of Customer's needs
Filled with youthful energy
Non-stop solution

www.dowonpack.com



DOWONPACK CO., LTD.



20, BISEUL-RO 387-GIL, OKPO-EUP,
 DALSEONG-GUN, DAEGU CITY, KOREA
 TEL : +82-53-611-7751
 FAX: +82-53-611-7752
 E-MAIL : dwpack01@naver.com



DOWONPACK CO., LTD.

The Ultimate Solution of PET & PP Strapping Band



Certification




E17/000624




E17/000625




ISO 9001

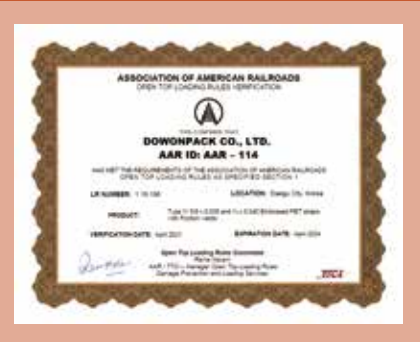

AAR-114

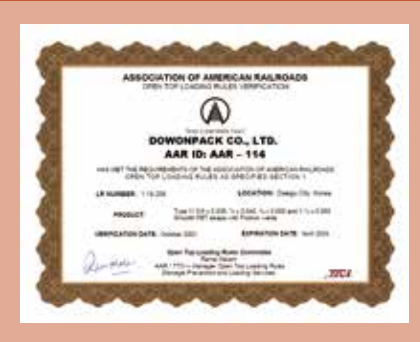


AAR-114

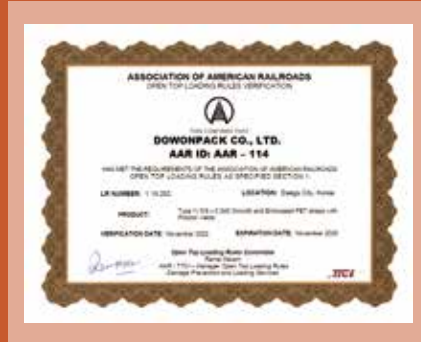

AAR-114



AAR-114

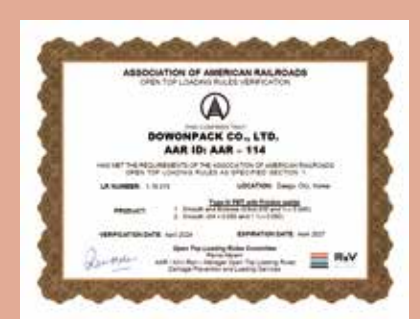

AAR-114



AAR-114

DWP

DOWONPACK CO., LTD.

Company Name

DOWONPACK CO., LTD.

Establishment Date

April 01, 2019

Representative

Yujin Hong

Business Area

Strapping band (PET/PP), automatic/manual binding machines, synthetic resins, various packaging materials, trade/manufacturing/wholesale

Head Office

20, Biseul-ro 387-gil, Okpo-eup, Dalseong-gun, Daegu, KOREA

Factory 1

59, Apo-gongdan-gil, Apo-eup, Gimcheon-si, Gyeongbuk, KOREA (Apo Factory)

Homepage

www.dowonpack.com

E-mail

dwpack01@naver.com

About PET Strapping Band

Connecting customers with Top quality

Polyester(PET) strapping band is tested and recommended for all well-established packaging machines. Complete quality control was the rule long before we attained ISO 9001, AAR approval.



Features

- We use PREMIUM raw materials and proper additives for high quality
- Various colors and surface types (Smooth/Embossed)
- Opaque green, transparent, black etc
- The most effective substitute of the high cost steel strap band
- High tensile strength
- Suitable for all well known packaging materials

Advantages

- Lower priced
- Best suitable materials for medium and/or heavy duty application
- Rust free and safe work
- High heat-resisting and lower elongation
- Environmental friendly



www.dowonpack.com



Application

COIL Industry

- Smooth surface
- Easy to handle
- Rust free
- Safe Working



TILE

- Smooth surface
- Easy to handle
- Rust free
- Safe Working
- Very high tensile strength



FLY WOOD & PALLET

- Easy to handle
- No rust
- Better productivity with automatic line



IRON PLATE

- Smooth surface
- Rust free
- Safe Working
- Very high tensile strength



ALUMINUM BAR

- Smooth surface
- Easy to handle
- Rust free
- Safe Working



FIBER Industry

- All kinds of staple fiber bale, cotton bale, roll

About PP Strapping Band

Connecting customers with Top quality

Our polypropylene(PP) strapping band is widely used in light packing like box packaging and news paper packing and easy to use and safe. Printing is available and customers can take advantage of effectiveness.



Features

- Best for light and/or medium-duty application
- Clear performance on all types of machine
- Uniform surface to keep strap tight
- The most economic plastic strapping

Advantages

- High tensile strength
- Super stiffness and free curvature
- Precise Winding
- Diamond embossing effect



Application

GENERAL MERCHANDISE

- Magazine
- News Paper
- Gift box



LIGHT BOX

- Small Parcels
- Light Weight Item



CABLE PACKING

- High Elongation



PIPE & CAN MANUFACTURING PACKING

- High Elongation



PALLET PACKING

ELECTRONIC PRODUCT PACKING



Specification of PET Strapping



Our Polyester(PET) strapping is tested and recommended for all well-established packaging machine

- Suitable for all well-known packaging materials
- The most effective substitute of the high cost steel strap
- Various colors and surface types
- Best Suitable materials for medium and/or heavy duty application

| Item | Part No. | Description | SPEC. | COLOR. | TYPE | CORE | B/S (LBS) | PALLET | KG/COIL | AAR Approval |
|-------|-------------|----------------------------|----------------------|--------|---------------|---------|-----------|---------|---------|--------------|
| PET | 120060GE200 | 12.0mm x 0.60mm(t) x 1900M | 1/2" x .024, 6500' | Green | Embossed | 16x6" | 635 | 24coils | 20.0 | |
| PET | 120070GE215 | 12.0mm x 0.70mm(t) x 1900M | 1/2" x .027, 6500' | Green | Embossed | 16x6" | 775 | 24coils | 21.5 | |
| PET | 120070GS215 | 12.0mm x 0.70mm(t) x 1900M | 1/2" x .027, 6500' | Green | Smooth | 16x6" | 820 | 24coils | 21.5 | |
| PET | 155075GE215 | 15.5mm x 0.75mm(t) x 1400M | 5/8" x .030, 4600' | Green | Embossed | 16x6" | 1,050 | 24coils | 21.5 | |
| PET | 155080GD215 | 15.5mm x 0.80mm(t) x 1280M | 5/8" x .032, 4200' | Green | Deep Embossed | 16x6" | 1,150 | 24coils | 21.5 | |
| PET | 155089GD205 | 15.5mm x 0.89mm(t) x 1200M | 5/8" x .035, 4000' | Green | Deep Embossed | 16x6" | 1,225 | 24coils | 20.5 | AAR-114 |
| PET | 155089GE215 | 15.5mm x 0.89mm(t) x 1200M | 5/8" x .035, 4000' | Green | Embossed | 16x6" | 1,300 | 24coils | 21.5 | AAR-114 |
| PET | 155089GS215 | 15.5mm x 0.89mm(t) x 1200M | 5/8" x .035, 4000' | Green | Smooth | 16x6" | 1,400 | 24coils | 21.5 | AAR-114 |
| PET | 155100GE215 | 15.5mm x 1.00mm(t) x 1050M | 5/8" x .040, 3500' | Green | Embossed | 16x6" | 1,600 | 24coils | 21.5 | AAR-114 |
| PET | 155100GS220 | 15.5mm x 1.00mm(t) x 1050M | 5/8" x .040, 3500' | Green | Smooth | 16x6" | 1,600 | 24coils | 22.0 | AAR-114 |
| PET | 155100BS220 | 15.5mm x 1.00mm(t) x 1050M | 5/8" x .040, 3500' | Black | Smooth | 16x6" | 1,600 | 24coils | 22.0 | AAR-114 |
| PET | 190100GE215 | 19.0mm x 1.00mm(t) x 900M | 3/4" x .040, 3000' | Green | Embossed | 16x6" | 1,750 | 24coils | 21.5 | AAR-114 |
| PET | 190100GS220 | 19.0mm x 1.00mm(t) x 900M | 3/4" x .040, 3000' | Green | Smooth | 16x6" | 1,750 | 24coils | 22.0 | AAR-114 |
| PET | 190100BE215 | 19.0mm x 1.00mm(t) x 900M | 3/4" x .040, 3000' | Black | Embossed | 16x6" | 1,750 | 24coils | 21.5 | AAR-114 |
| PET | 190127GS215 | 19.0mm x 1.27mm(t) x 650M | 3/4" x .050, 2200' | Green | Smooth | 16x6" | 2,300 | 24coils | 21.5 | AAR-114 |
| PET | 190127BS215 | 19.0mm x 1.27mm(t) x 650M | 3/4" x .050, 2200' | Black | Smooth | 16x6" | 2,300 | 24coils | 21.5 | AAR-114 |
| PET | 250100GS215 | 25.0mm x 1.00mm(t) x 620M | 1" x .040, 2050' | Green | Smooth | 16x6" | 2,300 | 24coils | 21.5 | AAR-114 |
| PET | 250100BS215 | 25.0mm x 1.00mm(t) x 620M | 1" x .040, 2050' | Black | Smooth | 16x6" | 2,300 | 24coils | 21.5 | AAR-114 |
| PET | 250127GS215 | 25.0mm x 1.27mm(t) x 490M | 1" x .050, 1600' | Green | Smooth | 16x6" | 2,800 | 24coils | 21.5 | AAR-114 |
| PET | 250127BS215 | 25.0mm x 1.27mm(t) x 490M | 1" x .050, 1600' | Black | Smooth | 16x6" | 2,800 | 24coils | 21.5 | AAR-114 |
| PET | 320100GS215 | 32.0mm x 1.00mm(t) x 480M | 1+1/4" x .040, 1600' | Green | Smooth | 16x6" | 3,250 | 24coils | 21.5 | AAR-114 |
| PET | 320100BS215 | 32.0mm x 1.00mm(t) x 480M | 1+1/4" x .040, 1600' | Black | Smooth | 16x6" | 3,250 | 24coils | 21.5 | AAR-114 |
| PET | 320127GS215 | 32.0mm x 1.27mm(t) x 380M | 1+1/4" x .050, 1250' | Green | Smooth | 16x6" | 3,700 | 24coils | 21.5 | AAR-114 |
| PET | 320127BS215 | 32.0mm x 1.27mm(t) x 380M | 1+1/4" x .050, 1250' | Black | Smooth | 16x6" | 3,700 | 24coils | 21.5 | AAR-114 |
| Jumbo | 155089GE700 | 15.5mm x 0.89mm(t) x 3750M | 5/8" x .035, 12500' | Green | Embossed | 16x7.5" | 1,300 | 5coils | 70.0 | AAR-114 |
| Jumbo | 155089GS710 | 15.5mm x 0.89mm(t) x 3750M | 5/8" x .035, 12500' | Green | Smooth | 16x7.5" | 1,300 | 5coils | 71.0 | AAR-114 |

Specification of PP Strapping



Our polypropylene(PP) strapping band is widely used in light packing like box packing and news paper packing and easy to use and safe. Printing is available and customers can take advantage of effectiveness of advertising

- Best substitute for light and/or medium-duty application
- Uniform surface to keep strap tight

| Item | Part No. | Basic Color | Type | Width | | Thickness | | Length | | Weight/Roll | | B/S | | Elongation |
|------|--------------|----------------|----------|-------|------|-----------|------|--------|--------|-------------|------|-----|-----|------------|
| | | | | Inch | mm | Inch | mm | feet | meters | lbs | kg | lbs | kg | |
| PP | 05A081(0.5T) | "White, Black" | Embossed | 0.20 | 5.0 | 0.020 | 0.50 | 16400 | 5,000 | 17.9 | 8.1 | 130 | 60 | 16+/-2 |
| PP | 06A114(0.6T) | "White, Black" | Embossed | 0.24 | 6.0 | 0.024 | 0.60 | 16400 | 5,000 | 25.1 | 11.4 | 180 | 80 | 16+/-2 |
| PP | 07A114(0.7T) | "White, Black" | Embossed | 0.28 | 7.0 | 0.028 | 0.70 | 13200 | 4,000 | 25.1 | 11.4 | 200 | 90 | 16+/-2 |
| PP | 08A100(0.5T) | "White, Black" | Embossed | 0.31 | 8.0 | 0.020 | 0.50 | 14800 | 4,500 | 22.0 | 10.0 | 180 | 80 | 16+/-2 |
| PP | 08A111(0.7T) | "White, Black" | Embossed | 0.31 | 8.0 | 0.028 | 0.70 | 11500 | 3,500 | 24.5 | 11.1 | 265 | 120 | 16+/-2 |
| PP | 09A100(0.6T) | "White, Black" | Embossed | 0.35 | 9.0 | 0.024 | 0.60 | 8900 | 2,700 | 22.0 | 10.0 | 240 | 110 | 16+/-2 |
| PP | 12A100(0.6T) | "White, Black" | Embossed | 0.47 | 12.0 | 0.024 | 0.60 | 6200 | 1,890 | 22.0 | 10.0 | 330 | 150 | 16+/-2 |
| PP | 12A100(0.7T) | "White, Black" | Embossed | 0.47 | 12.0 | 0.028 | 0.70 | 5900 | 1800 | 22.0 | 10.0 | 375 | 170 | 16+/-2 |
| PP | 12A100(0.8T) | "White, Black" | Embossed | 0.47 | 12.0 | 0.031 | 0.80 | 5400 | 1,650 | 22.0 | 10.0 | 420 | 190 | 16+/-2 |
| PP | 15A100(0.7T) | "White, Black" | Embossed | 0.59 | 15.0 | 0.028 | 0.70 | 5100 | 1,560 | 22.0 | 10.0 | 460 | 210 | 18+/-2 |
| PP | 15A100(0.8T) | "White, Black" | Embossed | 0.59 | 15.0 | 0.031 | 0.80 | 4750 | 1,440 | 22.0 | 10.0 | 485 | 220 | 18+/-2 |
| PP | 18A100(1.0T) | "White, Black" | Embossed | 0.71 | 18.0 | 0.040 | 1.00 | 3200 | 970 | 22.0 | 10.0 | 620 | 280 | 20+/-2 |



Tensioners & Combination Tools (OEM)



| ITEM | POLI 32HT |
|------------|-----------|
| STRAP SIZE | 32mm |
| TYPE | Pneumatic |
| B.S(N) | 6000 |
| WEIGHT(KG) | 5.6 |
| ORIGIN | Italy |



| ITEM | AQD-19 |
|------------|-----------|
| STRAP SIZE | 13~19mm |
| TYPE | Pneumatic |
| B.S(N) | 2740 |
| WEIGHT(KG) | 3.8 |
| ORIGIN | China |



| ITEM | P328 |
|------------|-----------------------|
| STRAP SIZE | 16~19mm |
| TYPE | Battery(Rechargeable) |
| B.S(N) | 3500 |
| WEIGHT(KG) | 4.3 |
| ORIGIN | China |



| ITEM | H-45L |
|------------|-----------------------|
| STRAP SIZE | 9~16mm |
| TYPE | Battery(Rechargeable) |
| B.S(N) | 2500 |
| WEIGHT(KG) | 4.3 |
| ORIGIN | Taiwan |



| ITEM CA100 | |
|--|--------|
| Designed for both plastic and oscillated wound steel strapping | |
| STRAP CORE ID : 406mm(16") | |
| Face 75mm(3") or 150mm(61") | |
| 1pc / carton | |
| ORIGIN | Taiwan |